



A 3 temperatures cabinet to mature and serve your wines in the best possible conditions.



EAN Code : 3543290003339


Range :	OXYGEN
Model :	OXG3T199NPD
Fonction :	Ageing, cooling and red wine serving cabinet
Capacity* :	199 Bottles**

- A constant temperature due to the dual Heating/Cooling controls.
- Optimised humidity due to the circulation of humid air.
- Air circulation ensured by the principle of thermodynamic pump.
- No vibration thanks to the slow-cycles compressor fixed on silentblocs + evaporator flooded in the high density polyurethane foam.
- Protection from UV light guaranteed with a solid door with highly effective UV filter.
- « Storage and/or sliding » universal shelf. One shelf for all types of storages. Suitable to store all types of bottles.

CONFIGURATION	Storage shelves	Sliding shelves	Capacity**
Maximum Configuration (100% sliding)		10	165
Mixed Configuration	3	3	190
Minimum Configuration (100% storage)	3		209
Standard Configuration	3	3	199

UNIVERSAL SHELF

Universal shelf : AOHUI
Weight: 2.6 kg
Type of structure: slats
Number of bottles per level : 12
Material: Solid Beechwood coated with an ecological water varnish.
AOHUI shelf is universal. It can be positioned in

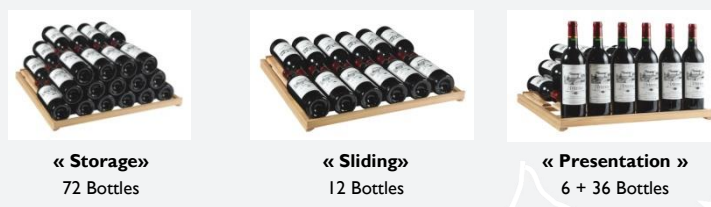

ArteVino AOHUI shelf has a label holder :

Description	Reference	EAN Code
Single Solid beechwood universal shelf	AOHUI	3543290002783

* Standard configuration
 ** Traditional Bordeaux bottles
 *** Calculated with an ambient temperature of 25°C
 **** Consumption calculated with an ambient temperature of 25°C using an appliance with standard configuration
 ***** R600a gas. With a R134a gas (for US, CA, Korea, Taiwan): 38 db(A)

GENERAL FEATURES

Gross weight, packaged(kg)*	: 108
Net weight (kg)*	: 92
Dimensions in packaging H x W x D (mm)	: 1940 x 700 x 750
Dimensions H x W x D (mm)	: 1825 x 680 x 700
Color scheme	: Black
Energy efficiency rating	: A+
Acoustic emissions (dB(A))*****	: 37
Electrical power (W)***	: 70
Electrical intensity (A)***	: 0.33
Consumption per 24h (KWh) ****	: 0.35
Annual energy consumption AEC* (kWh/year) ****	: 128
Ambient temperature operating limit	: 12 - 30°C

- ✓ **Digital electronic controls with temperature setting range from 10°C to 14°C (ageing area) and 15°C to 20°C (upper compartment)**
- Nb : The temperature in the lower compartment is induced by the ageing area programmed temperature. The gradient between these areas is between 4°C and 6°C
- ✓ **Temperature display on indoor sidewall**
- ✓ **Double Hot/ Cold circuit > Automatic « Winter function »**
- ✓ **Temperature fault alarm icon**
- ✓ **Interior lining of dimpled aluminium**
- ✓ **Solid door**
- ✓ **Hygrometry ensured by the principle of thermodynamic pump**
- ✓ **2 adjustable feet**
- ✓ **Lock**
- ✓ **Storage grid in the low part**
- ✓ **Inox Handle**